SG5.0/6.0RS

Suitable for 50Hz / 60Hz grid, could be used in Asia, Africa,South America, Australia and Europe. Available for hand installation, no need for lifting machinery assistance

HIGH YIELD

- Compatible with high power PV modules and bifacial modules
- Lower startup & wider MPPT voltage range
- Built-in smart PID Zero function

SAFE AND RELIABLE

- Integrated arc fault circuit interrupter
- Built-in Type II DC&AC SPD
- Corrosion protection rating at C5

USER FRIENDLY SETUP

- Plug and play installation
- One-click access to iSolarCloud monitoring platform
- Light and compact with optimized heat dissipation design

SMART MANAGEMENT

- Real time data (10 seconds refresh sample)
- 24/7 live online monitoring and with integrated display
- Online IV curve scan and diagnosis

CIRCUIT DIAGRAM

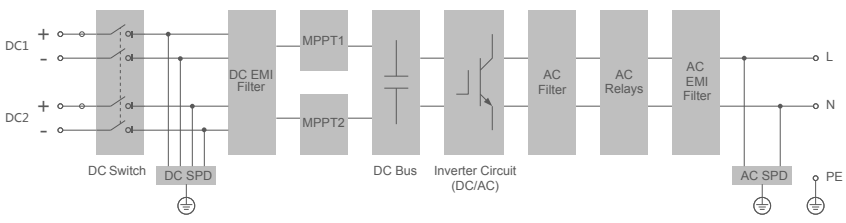

EFFICIENCY CURVE(SG5.0RS)

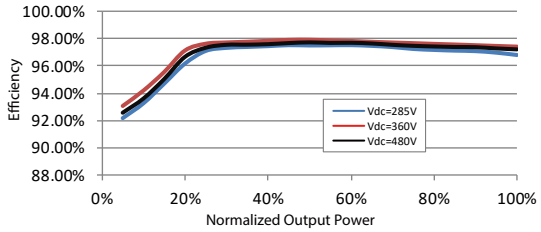

© 2023 Sungrow Power Supply Co., Ltd. All rights reserved. Subject to change without notice. Version 12

SUNGROW
Clean power for all

Type designation	SG5.0RS	SG6.0RS
Input (DC)		
Recommended max. PV input power	7.5 kWp	9 kWp
Max. PV input voltage	600 V	
Min. operating PV voltage / Start-up input voltage	40 V / 50 V	
Rated PV input voltage	360 V	
MPP voltage range	40 V – 560 V	
No. of independent MPP inputs	2	
Default No. of PV strings per MPPT	1	
Max. PV input current	32 A (16 A / 16 A)	
Max. DC short-circuit current	40 A (20 A / 20 A)	
Output (AC)		
Rated AC output power	5000 W *	6000 W
Max. AC Output power	5000 VA *	6000 VA
Rated AC output current (at 230 V)	21.8 A **	26.1 A
Max. AC output current	22.8 A **	27.3 A
Rated AC voltage	220 V / 230 V / 240 V	
AC voltage range	154 V – 276 V	
Rated grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz 60 Hz / 55 – 65 Hz	
Harmonic (THD)	< 3 % (at rated power)	
Power factor at rated power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / Connection phases	1 / 1	
Efficiency		
Max. efficiency / European efficiency	97.9 % / 97.3 %	97.9 % / 97.5%
Protection		
Grid monitoring	Yes	
DC reverse polarity protection	Yes	
AC short-circuit protection	Yes	
Leakage current protection	Yes	
Surge Protection	DC type II / AC type II	
DC switch	Yes	
PV string current monitoring	Yes	
Arc fault circuit interrupter (AFCI)	Yes	
PID Zero function	Yes	
Optimizer compatibility ***	Optional	
General Data		
Dimensions (W * H * D)	410 mm * 270 mm * 150 mm	
Weight	10 kg	
Mounting method	Wall-mounting bracket	
Topology	Transformerless	
Degree of protection	IP65	
Operating ambient temperature range	-25 ℃ to 60 ℃	
Allowable relative humidity range (non-condensing)	0 % - 100 %	
Cooling method	Natural cooling	
Max. operating altitude	4000 m	
Display	LED digital display & LED indicator	
Communication	Ethernet / WLAN / RS485 / DI (Ripple control & DRM)	
DC connection type	MC4 (Max. 6 mm^2)	
AC connection type	Plug and play connector (Max. 6 mm^2)	
Grid compliance	IEC / EN62109-1/2, IEC / EN62116, IEC / EN61727, IEC / EN61000-6-2/3, EN50549-1, AS4777.2, ABNT NBR 16149, ABNT NBR 16150, UNE 217002:2020, NTS V2 TypeA, CEI 0-21:2020, VDE0126-1-1/A1 (VFR-2019), UTE C15-712, C10/11, G98/G99,	
Grid Support	Active & reactive power control and power ramp rate control	

* AS 4777.2 4999 W , 4999 VA
** AS 4777.2 :Rated and Max. AC current is 21.7 A
*** For optimizer compatbility, please consult Sungrow before placing an oder

© 2023 Sungrow Power Supply Co., Ltd. All rights reserved. Subject to change without notice. Version 12